

CAM TWIST

MAGNETIC BREAKAWAY



The
EASIEST Breakaway
with the option to
easily disconnect,
inspect & reconnect
while installed

Easiest to Use & Longest Life

No other breakaway allows preventative maintenance inspection while installed. Made with permanent magnets, the Catlow® CAM TWIST is designed for easy inspection and consistent break force time after time.

Easily Inspected Without Removing it from Service

CAM TWIST can be taken apart with the twist of two wrenches, then easily inspected for corrosion and wear without removing from service. To reconnect, simply align the two halves and let the magnets do the work while pushing the unit back together.

350 LBS.
MAX. SEPARATION FORCE



CONSISTENT
FORCE REQUIRED
AFTER MULTIPLE
RECONNECTIONS

10 YR.
SERVICE LIFE

DURABLE
& COST
EFFECTIVE

7
OPTIONS

GAS, DIESEL, E25,
B85, B20, HI-FLOW
& VAC ASSIST

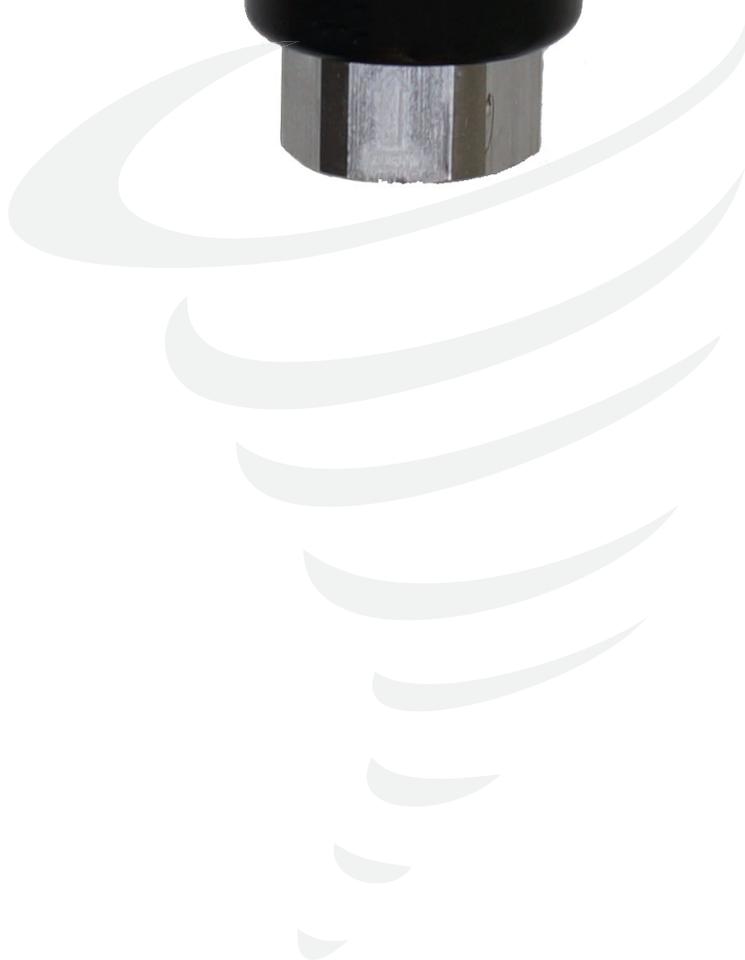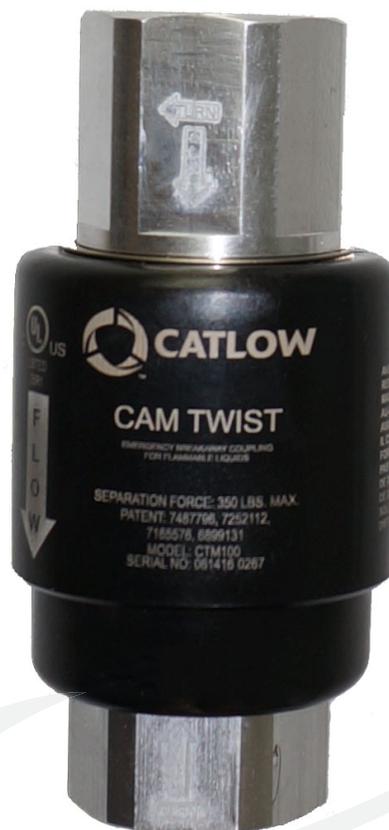

CAM TWIST

MAGNETIC BREAKAWAY

TECHNICAL DATA



Features & Benefits

- UL/ULC listed
- Meets NFPA 30A codes
- Patented magnetic snap-back technology
- Resists 'hydraulic hammer' problems
- Regular maintenance is not required
- Max separation force designed at 350 lbs.
- Industry-leading consistent separation force after multiple reconnections
- Reduced environmental impact from leaking due to the double O-ring seal
- Minimal tools required for reattachment
- Replacement lower half available if lost in a drive off incident
- 12-month warranty


CAM TWIST MODELS

CTM75 | 3/4" CAM TWIST Magnetic Breakaway

CTM100 | 1" CAM TWIST Magnetic Breakaway

CTMVA | VAC Assist CAM TWIST Magnetic Breakaway

CONSISTENT SEPARATION FORCE

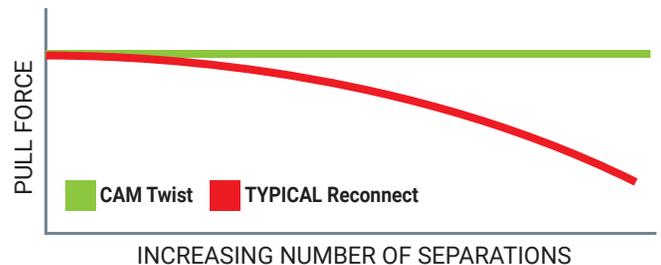

CAM TWIST REPLACEMENT PARTS

CTM75-L | 3/4" CAM TWIST Lower Unit

CTM100-L | 1" CAM TWIST Lower Unit

CTMVA-L | VAC Assist CAM TWIST Lower Unit

CAM TWIST REPAIR KITS

2976 | CTM75 and MCSB75 O-Ring Kit

2977 | CTMVA and CTMCA O-Ring Kit

CAM TWIST WHIPS, ADAPTERS & PARTS

4136 | 3/4" x 8" Whip Hose with Swivel End

4147 | 1" x 12" Whip Hose with Swivel End